

Ascent 150 II Square


ASCENT150 II SQ 1900 3K DALI EM

2059391



Product features

- ASCENT150 II SQ 1900 3K DALI EM is a high efficient downlight luminaire , Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Class II, Protection rating IP44/IK03

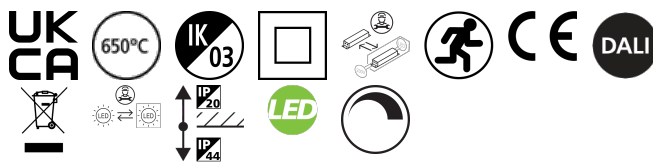





PRODUCT OVERVIEW

Product name	ASCENT150 II SQ 1900 3K DALI EM
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	119
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	80
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
IP rating	IP44/20
IK rating	IK03
Product EAN number	5025768593910
Luminous flux (emergency) (lm)	433

PHOTOMETRY

Ascent 150 II Square

ASCENT150 II SQ 1900 3K DALI EM
2059391



TECHNICAL DRAWINGS

