


## Sylproof Tubular LED - DALI

*Sylproof Tubular LED 2X1200 DALI WW*  
0047608



### Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED

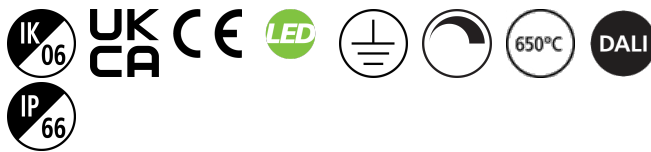


### PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1200 DALI WW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	4100
Luminous flux (lm)	4100
Luminaire efficacy (lm/W)	105.12
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476087

### PHOTOMETRY

## Sylproof Tubular LED - DALI

Sylproof Tubular LED 2X1200 DALI WW  
0047608



0.5	1.19 2.23	E(0°) E(90°) E(180°)	464 619 100
1.0	2.38 4.45	E(0°) E(90°) E(180°)	152 165 45
1.5	3.56 6.68	E(0°) E(90°) E(180°)	99 99 19
2.0	4.77 8.90	E(0°) E(90°) E(180°)	29 29 11
2.5	5.96 11.13	E(0°) E(90°) E(180°)	16 16 6
3.0	7.15 13.35	E(0°) E(90°) E(180°)	11 11 4

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 181.6°)  
 — C90 - C270 (Half beam angle: 100.0°)

## TECHNICAL DRAWINGS

