


Cassini Radius

CASSINI RADIUS 400 IK10 1185LM 830 DALI EM3 SILVER
4054915



Product features

- Ambient and decorative 400mm diameter LED bulkhead luminaire with halo backlight. Resistant to dust and water jet ingress, IP65, IK10, Class 1, 220-240V. 3000K, Switchable High Output or High efficiency mode, 630/1185 lm, 19 W, Drive current: 700mA, CRI 80, DALI dimmable, Integral 3 hour maintained emergency

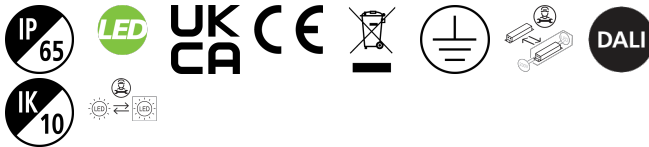


PRODUCT OVERVIEW

Product name	CASSINI RADIUS 400 IK10 1185LM 830 DALI EM3 SILVER
Technology	LED
Environment	Indoor
General application	Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	630/1185
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	19
Product Voltage (V)	240
Electrical protection	Class I
Housing colour	White
IP rating	IP65
IK rating	IK10
Product EAN number	5026524549158

PHOTOMETRY

Cassini Radius

CASSINI RADIUS 400 IK10 1185LM 830 DALI EM3 SILVER
4054915

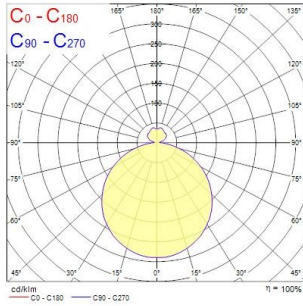

Distance [m]	Cone diameter [m]	E10% E50% E90%	Illuminance [lx]
0.5	1.56	50% 87.2°	172 14
1.0	3.12	50% 87.2°	43
1.5	4.67	50% 87.2°	19 2
2.0	6.23	50% 87.2°	11 1
2.5	7.79	50% 87.2°	7 1
3.0	9.35	50% 87.2°	5 0.5

Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 114.6°)

TECHNICAL DRAWINGS

