

START Panel Flat UGR19 600x600


START Panel Flat UGR19 600x600 DALI 4000Lm 840

0047204



Product features

- Edge lit LED flat panel with low glare (UGR<19). Low Flicker, 40 W, Neutral White, 4000 K, 4000 lumens, 100 lm/W, Average lifespan: 120.000Hrs, prismatic diffuser, aluminium frame, steel body, push-dim DALI driver of TRIDONIC (LCA 45W 500-1400mA one4all SR PRE 28000672). (HxWxD) 9.5 x 595 x 595 mm

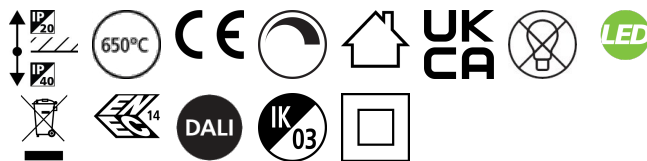


PRODUCT OVERVIEW

Product name	START Panel Flat UGR19 600x600 DALI 4000Lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278061
Warranty	5 years
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	40
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288472041

PHOTOMETRY

START Panel Flat UGR19 600x600

START Panel Flat UGR19 600x600 DALI 4000Lm 840
0047204

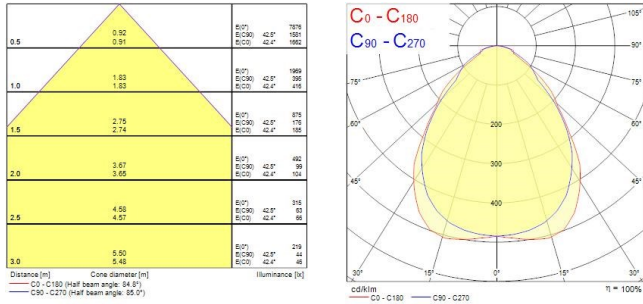

TECHNICAL DRAWINGS

