

ToLEDo Stick

ToLEDo Stick V4 850LM 865 E27 SL

0029563



Product features

- A bright, all-around lighting solution for living rooms, wall lights, ceiling lights, compact and decorative luminaires
- Quick and easy replacement of compact fluorescent, halogen or incandescent lamp
- 15,000H average rated life
- 85% energy savings compared to incandescent
- Last 50% longer and consume 45% less energy compared to compact fluorescent integrated lamps
- Omni-directional light distribution
- Non-dimmable



PRODUCT OVERVIEW

| | |
|---------------------------------|-------------------------------------|
| Product name | ToLEDo Stick V4 850LM 865 E27 SL |
| Technology | LED |
| Watt (Rated) (W) | 8.0 |
| Type | LED exchangeable |
| Cap/Base | E27 |
| Fixture rating | Open |
| General application | Hospitality, Residential & Consumer |
| ETIM Class | EC001959 |
| E-number FI | 4740969 |
| Warranty | 3 years |
| Luminous flux (lm) | 850 |
| Colour temperature (K) | 6500 |
| Light colour | Daylight |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Photobiological Risk Group | RG0 |
| Wattage (W) | 8.0 |
| Product Voltage (V) | 230 |
| Dimmable | No |
| Average life (Nominal) (h) | 15000 |
| Product EAN number | 5410288295633 |

DATA TABLE

General data

| | |
|---------------------|-------------------------------------|
| Product name | ToLEDo Stick V4 850LM 865 E27 SL |
| Technology | LED |
| Watt (Rated) (W) | 8.0 |
| Type | LED exchangeable |
| Cap/Base | E27 |
| Fixture rating | Open |
| General application | Hospitality, Residential & Consumer |

ToLEDo Stick

ToLEDo Stick V4 850LM 865 E27 SL

0029563

| | |
|---|--------------|
| Operating temperature range (°C) | -20°C - 40°C |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001959 |
| E-number FI | 4740969 |
| Warranty | 3 years |

Optical data

| | |
|--|----------|
| Luminous flux (lm) | 850 |
| Luminous flux (Rated) (lm) | 850 |
| Colour temperature (K) | 6500 |
| Light colour | Daylight |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Photobiological Risk Group | RG0 |
| Lumen maintenance at end of nominal life (%) | 70 |

Electrical data

| | |
|---|---------|
| Wattage (W) | 8.0 |
| Equivalent watt (W) | 60 |
| Product Voltage (V) | 230 |
| Control gear required | No |
| No. Of switching cycles before premature failures | >50000 |
| Transformer required | No |
| Dimmable | No |
| Inrush Current (A) | 1.1 |
| Inrush Duration (µs) | 160 |
| Lamp Energy Label (class) | F |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. Luminaires per 16A C Breaker | 160 |
| Max. Luminaires per 20A C Breaker | 160 |
| Max. Luminaires per 10A B Breaker | 160 |
| Max. Luminaires per 13A B Breaker | 160 |
| Max. Luminaires per 16A B Breaker | 160 |

Lifetime data

| | |
|----------------------------|-------|
| Lifespan L70 B50 | 15000 |
| Average life (Nominal) (h) | 15000 |
| Average life (Rated) (h) | 15000 |

Physical data

| | |
|-------------------------------|-------|
| Nominal Product Height (mm) | 115 |
| Nominal Product Diameter (mm) | 37 |
| Weight (kg) | 0.042 |

Packaging

| | |
|-----------------------|---------------|
| Single packaging type | Carton |
| Product EAN number | 5410288295633 |

ToLEDo Stick

ToLEDo Stick V4 850LM 865 E27 SL


0029563

| | |
|---------------------------------------|----------------|
| Packaging single length / height (cm) | 5.0 |
| Packaging single width (cm) | 5.0 |
| Packaging single depth (cm) | 12.3 |
| DUN14 (outer) | 15410288295630 |
| Units per outer package | 6 |
| Packaging outer length / height (cm) | 15.4 |
| Packaging outer width (cm) | 10.3 |
| Packaging outer depth (cm) | 13.7 |


Safety data

| | |
|-------------------------------------|--|
| Optimal operating condition (°C) | -20-40 |
| Breakage cleaning instructions | Not applicable |
| Special purpose lamp | No |
| Dry applications use only | Yes |
| Suitable for household illumination | Yes |
| Safety message | Not Suitable for totally enclosed fixtures |

PHOTOMETRY

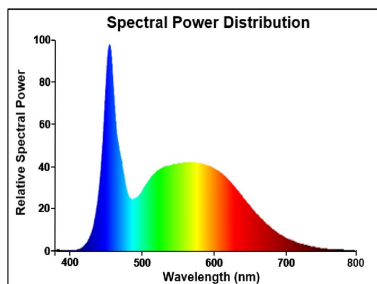

TECHNICAL DRAWINGS



SYLVANIA

ToLEDo Stick

ToLEDo Stick V4 850LM 865 E27 SL

0029563



SYLVANIA

0029563



8
kWh/1000h



2019/2015

ToLEDo Stick

ToLEDo Stick V4 850LM 865 E27 SL

0029563



0029563



8
kWh/1000h



2019/2015