

## TOLEDO BALL

ToLEDo Ball V7 806LM 840 E27 SL

0029633



### Product features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent ball lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- 15,000 hours average rated life



## PRODUCT OVERVIEW

Product name	ToLEDo Ball V7 806LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	6.5
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741018
Warranty	3 years
Luminous flux (lm)	806
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Wattage (W)	6.5
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288296333

## DATA TABLE

### General data

Product name	ToLEDo Ball V7 806LM 840 E27 SL
--------------	---------------------------------

## TOLEDO BALL

*ToLEDo Ball V7 806LM 840 E27 SL*

0029633

Technology	LED
Watt (Rated) (W)	6.5
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741018
Warranty	3 years

### Optical data

Luminous flux (lm)	806
Luminous flux (Rated) (lm)	806
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	6.5
Equivalent watt (W)	60
Product Voltage (V)	230
Control gear required	No
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Inrush Current (A)	2.8
Inrush Duration (µs)	380
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	57
Max. Luminaires per 16A B Breaker	29

### Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### Physical data

Nominal Product Length (mm)	77
Nominal Product Diameter (mm)	45
Weight (kg)	0.045

## TOLEDO BALL

ToLEDo Ball V7 806LM 840 E27 SL

0029633


### Packaging

Single packaging type	Carton
Product EAN number	5410288296333
Packaging single length / height (cm)	9.5
Packaging single width (cm)	5.0
Packaging single depth (cm)	5.0
DUN14 (outer)	15410288296330
Units per outer package	6
Packaging outer length / height (cm)	15.8
Packaging outer width (cm)	10.7
Packaging outer depth (cm)	10.2


### Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

## PHOTOMETRY

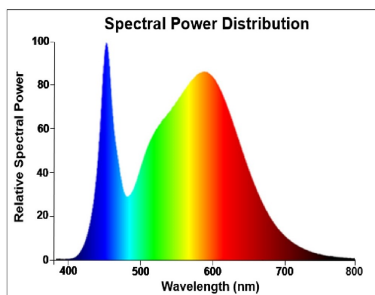

## TECHNICAL DRAWINGS



# SYLVANIA

## TOLEDO BALL


ToLEDo Ball V7 806LM 840 E27 SL

0029633



### SYLVANIA

0029633

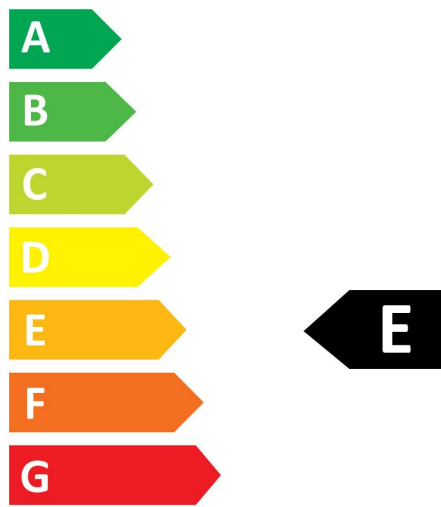

**7**  
kWh/1000h



2019/2015

# SYLVANIA

## TOLEDO BALL

ToLEDo Ball V7 806LM 840 E27 SL

0029633



0029633



**7**  
kWh/1000h



2019/2015