

## Interrata Adjustable


INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 840 MB

0049043



### Product features

- Round shaped in-ground luminaire with +/-30° adjustable light module, drive-over for pressure loads to 2000kg (20kN), comes with 2m 3x1mm<sup>2</sup> flying lead and recessing tube, aluminium housing with Stainless steel decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 1075lm, 13.5W, 80lm/W, CRI80, 30° beam angle, 50000 hrs L70 B50 lumen maintenance, 200mm diameter, 229mm recessing tube height, 2.3kg weight.

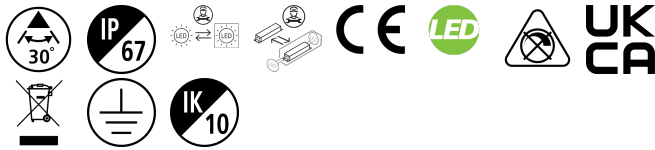


## PRODUCT OVERVIEW

Product name	INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 840 MB
Technology	LED
Housing	Aluminium
Mount	Ground recessed
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer
ETIM Class	EC000758
E-number FI	4579506
Warranty	5 years
Fixture luminous flux (lm)	1075
Luminaire efficacy (lm/W)	80
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	13.5
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Product EAN number	5410288490434

## PHOTOMETRY

## Interrata Adjustable

INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 840 MB  
0049043



Distance [m]	Cone diameter [m]	E0° [lx]	E(C90) 15.0° [lx]	E(C0) 18.0° [lx]
0.5	0.25 0.25	1105	8770	5038
1.0	0.50 0.57	2828	2268	1259
1.5	0.84 0.86	1268	993	560
2.0	1.12 1.19	707	571	346
2.5	1.40 1.43	482	393	242
3.0	1.68 1.72	314	247	149

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 30.2°)  
 — C90 - C270 (Half beam angle: 31.2°)

## TECHNICAL DRAWINGS

