



## A series of circular recessed luminaires for uplighting

### Interrata

The Interrata family offers recessed walk over and drive over ground lights for lighting of building facades and sculptures. Available in 4 different sizes from 100mm to 260mm. The adjustable structure makes it possible to tilt +/- 30 degree for the fine tuning of the light effect at different applications.



## Features

- Round shaped, Stainless Steel bezel
- One fixed and three adjustable size (100 / 400 / 1000 / 2000lm; 3 – 29W)
- Ø 100 / 120 / 200 / 260mm diameter
- Clear and Frosted glass options for the XS size
- Adjustable tilt +/- 30 degrees on either side (S/M/L size)
- Complete with a pre-wired 2m cable
- L70B50 lumen maintenance 50,000 hrs
- Wide range of operating temperature range (-20 - +45°C for XS / S; -20 - +40°C for M / L)
- Honeycomb and frosted glass accessory for the adjustable version
- IP68 plastic junction box or T-shaped connector for LILO capability
- IP68 linear connector
- Pressure load 2000kg (~20kN) for S/M/L and 500kg (~5kN) for XS

## Product information


Code	Description	Diameter (mm)	Luminous Flux (lm)	Power (W)	Efficacy (lm/W)	Colour Temperature (K)	Beam angle (°)	Maximum load pressure (kN)	Maximum load (kg)
<b>Interrata</b>									
0049036	Interrata XS IP67 Frosted 100lm 830	100	115	3.5	33	3000	100	5	500
0049037	Interrata XS IP67 Frosted 100lm 840	100	125	3.5	36	4000	100	5	500
0049038	Interrata XS IP67 Clear 100lm 830 NB	100	125	2.7	46	3000	12	5	500
0049039	Interrata XS IP67 Clear 100lm 840 NB	100	140	2.7	52	4000	12	5	500
0049040	Interrata Adjustable S IP67 Clear 400lm 830 MB	120	390	5.7	68	3000	30	20	2000
0049041	Interrata Adjustable S IP67 Clear 400lm 840 MB	120	390	5.7	68	4000	30	20	2000
0049042	Interrata Adjustable M IP67 Clear 1000lm 830 MB	200	1025	13.5	76	3000	30	20	2000
0049043	Interrata Adjustable M IP67 Clear 1000lm 840 MB	200	1075	13.5	80	4000	30	20	2000
0049044	Interrata Adjustable L IP67 Clear 2000lm 830 MB	260	2000	29	69	3000	25	20	2000
0049045	Interrata Adjustable L IP67 Clear 2000lm 840 MB	260	2075	29	72	4000	25	20	2000

## Accessories

Code	Description
0049046	Interrata Adjustable S Frosted Glass
0049047	Interrata Adjustable M Frosted Glass
0049048	Interrata Adjustable L Frosted Glass
0049049	Interrata Adjustable S Honeycomb
0049050	Interrata Adjustable M Honeycomb
0049051	Interrata Adjustable L Honeycomb
0049052	Interrata IP68 Lilo Junction Box
0049077	IP68 Connector 3P
0049081	IP68 T Connector 3P



Interrata Adjustable S Frosted Glass



Interrata Adjustable M Honeycomb



Interrata IP68 Lilo Junction Box




IP68 Connector 3P




IP68 T Connector 3P


## Photometric Data




Extra Small - Clear




Extra Small - Frosted



Small



Medium



Large

## Additional Images



Extra Small Frosted



Extra Small Clear



Small





Medium



Large



## Dimensions (mm)

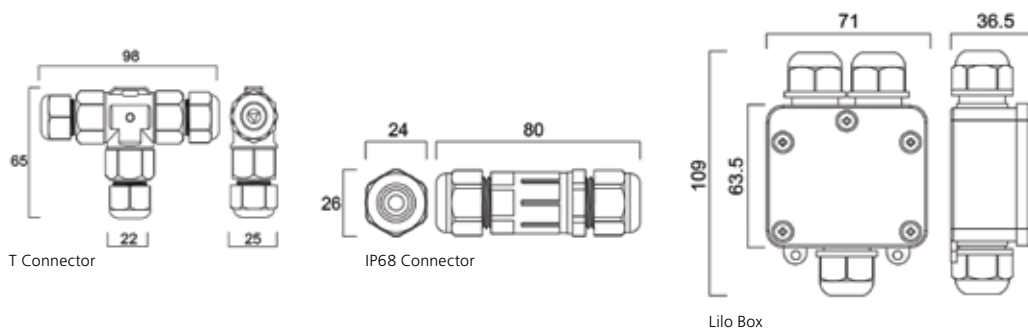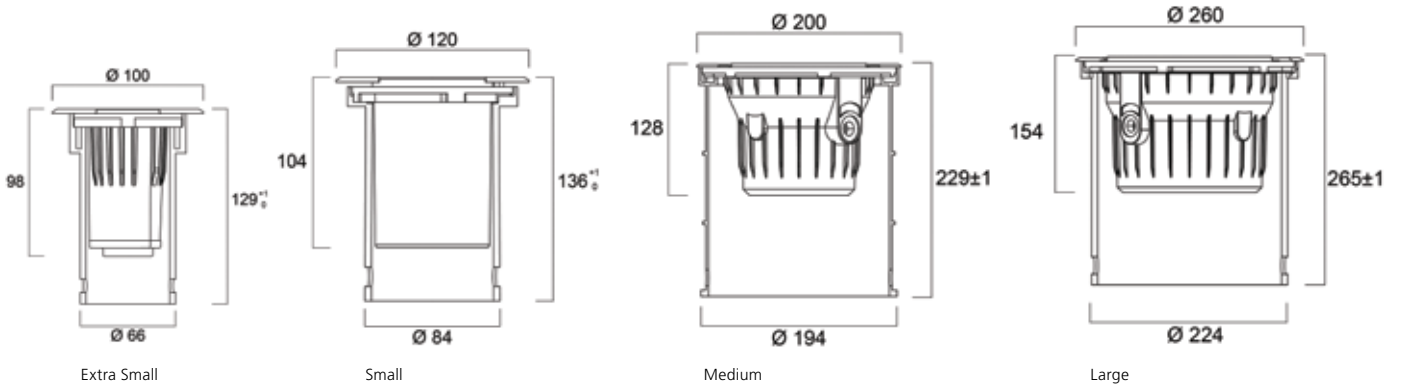



# SYLVANIA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. May 2020

[sylvania-lighting.com](http://sylvania-lighting.com)

A Feilo Sylvania Company