

Beacon LED - High Output

BEACON 85CRI 3K NARROW BEAM L1 TRAILING EDGE WHITE

2059653



Product features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 12° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 2013lm, luminaire efficacy: 96lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 1-circuit track adaptor, suitable for Concord Lytespan 1 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x169mm, weight: 0.96kg.



PRODUCT OVERVIEW

Product name	BEACON 85CRI 3K NARROW BEAM L1 TRAILING EDGE WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4280809
E-number SE	7401230
Warranty	5 years
Fixture luminous flux (lm)	2013
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Beam Angle (°)	12
Photobiological Risk Group	RG1
Total power consumption (W)	21
Product Voltage (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Minimum dimming level (%)	97
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596539

Beacon LED - High Output

BEACON 85CRI 3K NARROW BEAM L1 TRAILING EDGE WHITE
2059653

DATA TABLE

General data

Product name	BEACON 85CRI 3K NARROW BEAM L1 TRAILING EDGE WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4280809
E-number SE	7401230
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2013
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	12
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Mains voltage (V)	220-240V~
Product Voltage (V)	240
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Transformer required	Yes
Minimum dimming level (%)	97
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	48
Max. Luminaires per 16A C Breaker	80

Lifetime data

Beacon LED - High Output

BEACON 85CRI 3K NARROW BEAM L1 TRAILING EDGE WHITE
2059653

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	44000
Lifespan L90 B20	37000
Lifespan L90 B10	34000



Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	70
Nominal Product Width (mm)	130
Nominal Product Height (mm)	169
Nominal Product Diameter (mm)	80
Weight (kg)	1.543

Packaging

Single packaging type	Carton
Product EAN number	5025768596539
Packaging single length / height (cm)	6.299
Packaging single width (cm)	6.929
Packaging single depth (cm)	7.165
DUN14 (outer)	05025768596539
Units per outer package	1
Packaging outer length / height (cm)	6.299
Packaging outer width (cm)	6.929
Packaging outer depth (cm)	7.165

PHOTOMETRY

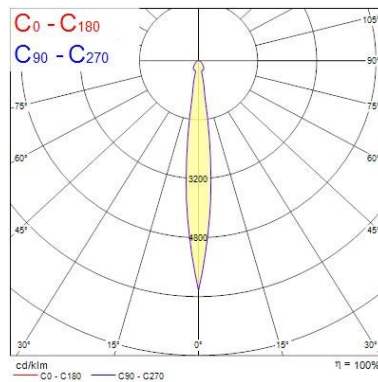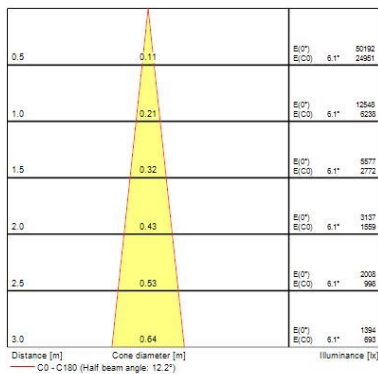

Beacon LED - High Output

BEACON 85CRI 3K NARROW BEAM L1 TRAILING EDGE WHITE

2059653

TECHNICAL DRAWINGS

