



High quality LED lantern

Zodiac



The new generation Zodiac LED lantern is made of high quality die-cast aluminium housing and robust build and protection with IK08 and IP66 ratings, offering a perfect solution for amenity including car parks and perimeter lighting. Zodiac comes in two sizes (small and medium) and a choice of lumen packages (7400, 10,300, 13,200 or 20,600lm), delivering up to 149lm/W. The range offers photocell versions, which allows for operation during dusk to dawn.


Features

- Perfect for amenity including car parks and perimeter lighting
- Two size options: small or medium
- Range of lumen packages available: 7400, 10,300, 13,200 and 20,600lm
- Efficacy up to 149lm/W
- High quality die-cast aluminium housing
- Neutral white (4000K) colour temperature
- Robust build and protection: IK08 and IP66
- Available in Grey RAL 9022 colour finish
- Colour rendering index: Ra 70
- Wall mounting bracket and 76 to 60mm post top adapter as accessories
- Adjustable mounting bracket that allows for use on either 60mm side entry or post top spigot
- Recommended for mounting heights of 6-12 metres
- Long lifetime of 50,000 hours at L70 B50
- 10 kV Surge protection


Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/w)	Colour Temp (K)	Voltage (V)	Weight	Electrical protection class	Lumen Maintenance L70B50
Zodiac									
Items without photocell									
0049970	Zodiac Small G2 7KLM 4000K CLI Grey	54	7400	137	4000	220-240	3.4	Class I	50,000
0049974	Zodiac Medium G2 10KLM 4000K CLI Grey	69	10,300	149	4000	220-240	6.2	Class I	50,000
0049978	Zodiac Medium G2 13KLM 4000K CLI Grey	93	13,200	142	4000	220-240	6.2	Class I	50,000
0049982	Zodiac Medium G2 21KLM 4000K CLI Grey	148	20,600	139	4000	220-240	6.2	Class I	50,000
Items with photocell									
0049971	Zodiac Small G2 7KLM 4000K CLI Grey PH	54	7400	137	4000	220-240	3.4	Class I	50,000
0049975	Zodiac Medium G2 10KLM 4000K CLI Grey PH	69	10,300	149	4000	220-240	6.2	Class I	50,000
0049979	Zodiac Medium G2 13KLM 4000K CLI Grey PH	93	13,200	142	4000	220-240	6.2	Class I	50,000
0049983	Zodiac Medium G2 21KLM 4000K CLI Grey PH	148	20,600	139	4000	220-240	6.2	Class I	50,000

Code	Description
Accessories	
0049986	Wall mount bracket 60mm
0049987	76-60mm adapter

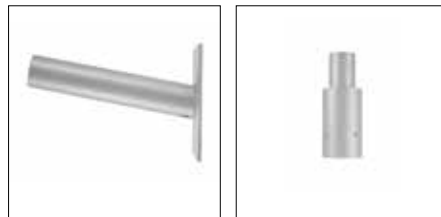


Additional Images

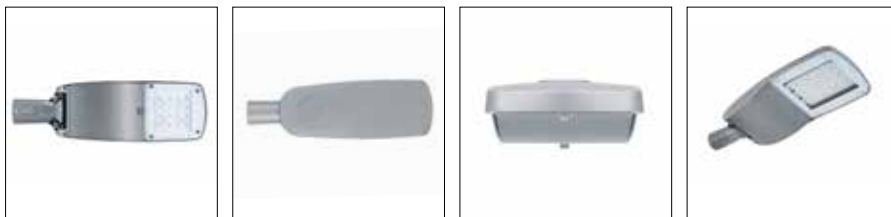

Zodiac Small - bottom view Zodiac Small - top view Zodiac Small - front view Zodiac Medium

Photometric Data

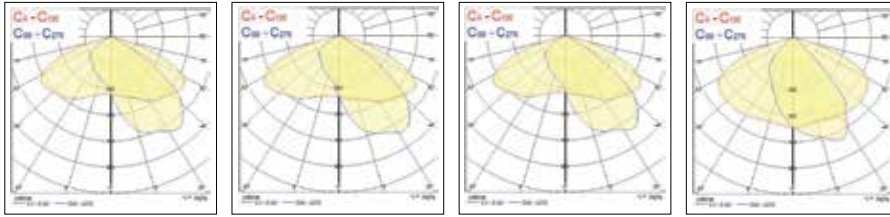


7KLM

10KLM

13KLM


21KLM

Dimensions (mm)

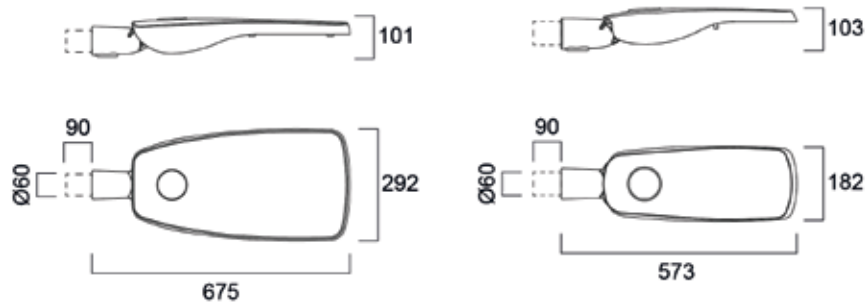


Zodiac Medium

Zodiac Small

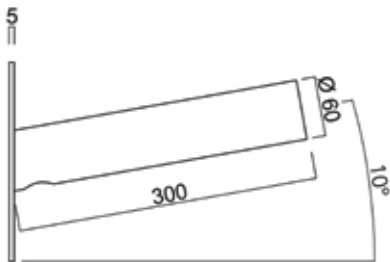

0049986 Wall mounting bracket

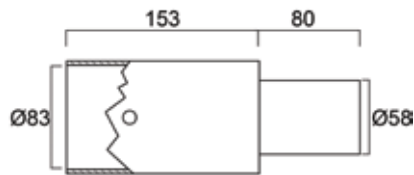

0049987 76-60mm post top adapter



SYLVANIA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. September 2020

sylvania-lighting.com

A Feilo Sylvania Company