

Hydroproof LED G3 SylSmart


HYDROPROOF LED G3 1200mm T 4K DALI E3 SSH01

0048791



Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire including SylSmart Connected Building (SSH) technology, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1278 mm x W 110 mm x H 78 mm size, GRP housing, PMMA diffuser, DALI dimmable, 3 hour emergency, 4000K, CRI80, 5550 lm, 40 W, 138 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I,IK02, IP65.




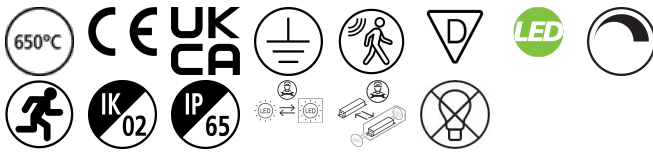


PRODUCT OVERVIEW

Product name	HYDROPROOF LED G3 1200mm T 4K DALI E3 SSH01
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	5550
Luminaire efficacy (lm/W)	138
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Photobiological Risk Group	RG1
Total power consumption (W)	40
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487915

PHOTOMETRY

Hydroproof LED G3 SylSmart HYDROPROOF LED G3 1200mm T 4K DALI E3 SSH01 0048791



TECHNICAL DRAWINGS

