


Ascent 100 II Arch 120

ASCENT 100 II ARCH 900 3K STD EMG 120
2060511



Product features

- The ASCENT 100 II ARCH 900 3K STD EMG 120 is a high efficient non dimmable downlight luminaire with 3 hour emergency, Colour rendering index Ra >80, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 137mm

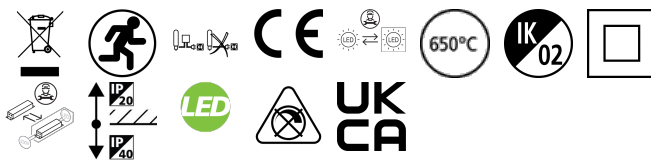





PRODUCT OVERVIEW

Product name	ASCENT 100 II ARCH 900 3K STD EMG 120
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	900
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	85
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768605118

PHOTOMETRY

Ascent 100 II Arch 120

ASCENT 100 II ARCH 900 3K STD EMG 120
2060511



TECHNICAL DRAWINGS

