

RefLED R63

RefLED R63 V4 630LM 840 E27 SL

0029209



Product features

- Energy efficient LED alternative for traditional incandescent and halogen blown reflector lamp
- Modern construction and attractive design
- Mercury free solution
- Long average rated lifetime: 15,000 hours
- Lower maintenance cost compared to traditional lamps
- Non-dimmable
- 3 years warranty
- Perfect for general lighting applications: residential lighting, down lights, hotels, hotels, restaurants, bars, lobbies, corridors, halls, etc



PRODUCT OVERVIEW

Product name	RefLED R63 V4 630LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	7
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741089
Warranty	3 years
Luminous flux (lm)	630
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Wattage (W)	7
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288292090

DATA TABLE

General data

Product name	RefLED R63 V4 630LM 840 E27 SL
Technology	LED

RefLED R63

RefLED R63 V4 630LM 840 E27 SL

0029209

Watt (Rated) (W)	7
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741089
Warranty	3 years

Optical data

Luminous flux (lm)	630
Rated Luminous Flux Useful (lm)	630
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	7
Equivalent watt (W)	50
Product Voltage (V)	230
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	No
Dimmable	No
Inrush Current (A)	2
Inrush Duration (µs)	240
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	80
Max. Luminaires per 16A B Breaker	40

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	97
Nominal Product Diameter (mm)	63
Weight (kg)	0.04

RefLED R63

RefLED R63 V4 630LM 840 E27 SL

0029209


Packaging

Single packaging type	Carton
Product EAN number	5410288292090
Packaging single length / height (cm)	6.3
Packaging single width (cm)	6.3
Packaging single depth (cm)	10.0
DUN14 (outer)	15410288292097
Units per outer package	6
Packaging outer length / height (cm)	19.7
Packaging outer width (cm)	13.3
Packaging outer depth (cm)	10.7


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

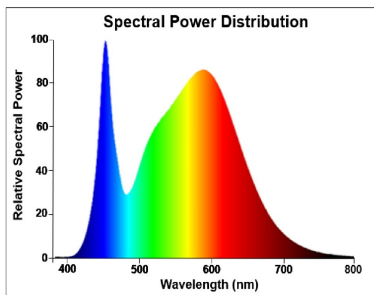

TECHNICAL DRAWINGS



SYLVANIA

RefLED R63

RefLED R63 V4 630LM 840 E27 SL

0029209



SYLVANIA

0029209



7
kWh/1000h



2019/2015

SYLVANIA


RefLED R63

RefLED R63 V4 630LM 840 E27 SL

0029209



0029209

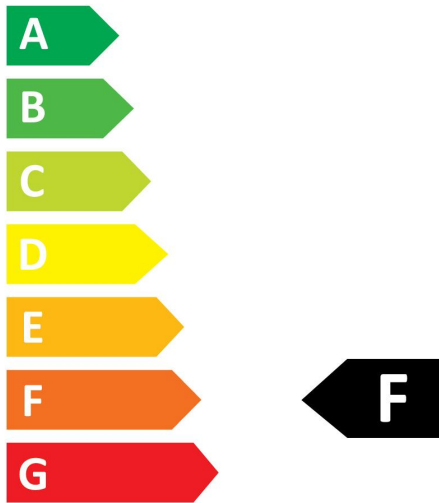

7
kWh/1000h



2019/2015