



Contemporary twist on a classic bollard

START Bollard IP65

START Bollard IP65 is a modern take on the classic style bollard. Ideal for landscape lighting such as gardens, parks, pathways, and exterior commercial areas. Additionally, the START Bollard IP65 is suitable for coastal areas. The range is available in 0.5m and 1m with a robust IK10 rating.

START Bollard IP65



Features

- Contemporary designed bollard
- Perfect for landscape lighting such as gardens, parks, pathways & exterior commercial areas
- Salt spray tested for 1000 hours
- Robust design meets IK10 requirements
- Available in 2 heights: 500mm & 1000mm
- High efficient thermal design: ta -35 to +50°C
- High performance: delivers up to 1100lm (luminaire lumen output), and up to 42lm/W (total system efficiency)
- Available in Warm White (3000K) & Neutral White (4000K)
- Lifetime: 50,000 hours

Product information

Code	Description	Driver	Body Colour	Height (m)	Colour Name	Colour Temperature (K)	Voltage (V)	Drive Current (mA)	System Power Consumption (W)	Lumen Output (lm)	Efficacy (lm/W)	Lifetime (Hour)	Weight (Kg)
Start Bollard IP65													
0047940	START Bollard M IP65 1100lm 830 BLK	Electronic	RAL9005	0.5	Warm White	3000	220-240	1200	26	1100	42	50,000	5.5
0047941	START Bollard L IP65 1100lm 830 BLK	Electronic	RAL9005	1	Warm White	3000	220-240	1200	26	1100	42	50,000	6.5
0047942	START Bollard M IP65 1100lm 840 BLK	Electronic	RAL9005	0.5	Neutral White	4000	220-240	1200	26	1100	42	50,000	5.5
0047943	START Bollard L IP65 1100lm 840 BLK	Electronic	RAL9005	1	Neutral White	4000	220-240	1200	26	1100	42	50,000	6.5

Legend: 830 = 80 CRI & 3000K CCT; 840 = 80 CRI & 4000K CCT, BLK = Black; M = Medium; L = Large

Accessory

Code	Description
0047998	START Bollard IP65 root mounting KIT




START Bollard IP65 root mounting KIT

Additional image




Photometric Data



START Bollard IP65

Dimensions (mm)

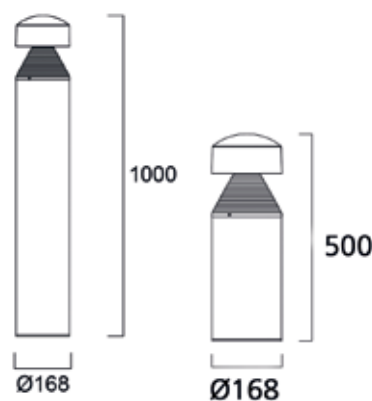

sylvania-lighting.com

A Feilo Sylvania Company

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft. Copyright Feilo Sylvania International Group Kft. March 2021

T: F:
Email: