


Myriad Adjustable Round - White with White bezel

MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ
2058029



Product features

- The Myriad Adjustable Round recessed spotlight is a high efficient accent downlight, fixture color White, correlated colour temperature of 2700K, color rendering index Ra144, fixture lumen 567lm, total power consumption 10W, luminaire efficacy 57 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 76mm, width 76mm, height 115mm, cut-out dimension 76mm, IP rating IP20, 5 years warranty.

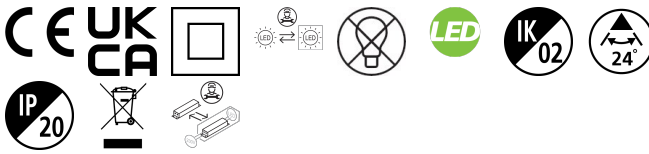

PRODUCT OVERVIEW

Product name	MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	24
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768580293

DATA TABLE

General data

Product name	MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor

Myriad Adjustable Round - White with White bezel

MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ
2058029

General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	24
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Mains voltage (V)	230-240V~
Electrical protection	Class II
Transformer required	Yes
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Physical data



Housing colour	White
IP rating	IP20
IK rating	IK02
Cutout Dimensions (W x L in mm or Diameter in mm)	76
Max. Lamp Diameter (mm) - D	90
Weight (kg)	0.38
Recessed Depth (mm)	115

Packaging

Single packaging type	Carton
Product EAN number	5025768580293
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768580293
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

Myriad Adjustable Round - White with White bezel MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ 2058029

PHOTOMETRY

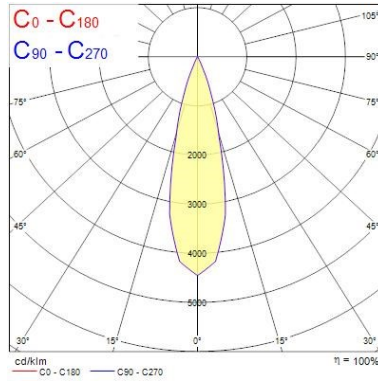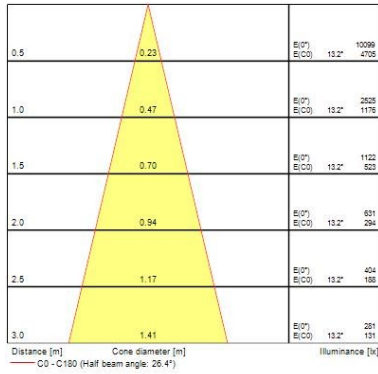

TECHNICAL DRAWINGS

