

START Panel Flat 1200x300

START FLAT PANEL LED 1200 NW
0047438



Product features

- Edge lit LED flat panel. 45 W, Neutral white, 3700 K, 4000 lumens, 82 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 1195 x 295 mm




PRODUCT OVERVIEW

Product name	START FLAT PANEL LED 1200 NW
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4274375
E-number SE	7013619
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	45
Electrical protection	Class II
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK05
Product EAN number	5410288474380

PHOTOMETRY

START Panel Flat 1200x300 START FLAT PANEL LED 1200 NW 0047438

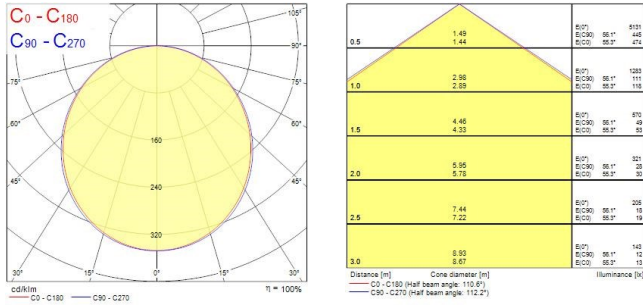

TECHNICAL DRAWINGS

