

## START Panel Flat 600x600


START Panel Flat 600x600 HE 4300Lm 840

0047215



### Product features

- Edge lit LED flat panel. Low Flicker, 35 W, Neutral White, 4000 K, 4300 lumens, high efficacy, 123 lm/W, Average lifespan: 120.000Hrs, PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 9.5 x 595 x 595 mm

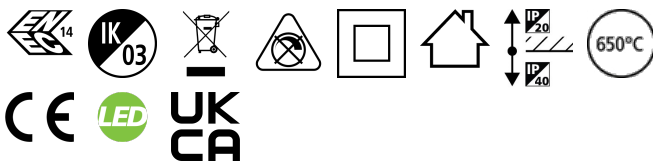


## PRODUCT OVERVIEW

Product name	START Panel Flat 600x600 HE 4300Lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4276936
Warranty	5 years
Fixture luminous flux (lm)	4,350
Luminaire efficacy (lm/W)	124
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288472157

## PHOTOMETRY

## START Panel Flat 600x600

*START Panel Flat 600x600 HE 4300Lm 840*  
0047215

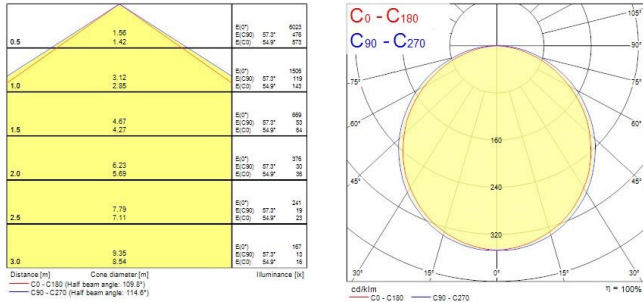

## TECHNICAL DRAWINGS

