

DeltaWing LED - DALI dimmable & Microwave sensor

DELTAWING LED72 DALI MW 4K 1200
0044899



Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, DALI dimmable, Microwave sensor, 7260lm, 71W, lifespan: 55,000 hours L90B10, A++ A+ A



PRODUCT OVERVIEW

Product name	DELTAWING LED72 DALI MW 4K 1200
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Education, Hospitality, Logistics & Industry, Office, Retail
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	7260
Luminaire efficacy (lm/W)	102.25
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	102
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	71
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	95
Housing colour	White
IP rating	IP44
IK rating	IK08
Product EAN number	5410288448992

DATA TABLE

General data

Product name	DELTAWING LED72 DALI MW 4K 1200
--------------	---------------------------------

DeltaWing LED - DALI dimmable & Microwave sensor *DELTAWING LED72 DALI MW 4K 1200* 0044899

Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Education, Hospitality, Logistics & Industry, Office, Retail
Operating temperature range (°C)	-10°C - 25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	7260
Luminaire efficacy (lm/W)	102.25
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	102
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	71
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	Yes
Minimum dimming level (%)	95
Drive current (mA)	350
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55800

Physical data

Housing colour	White
IP rating	IP44
IK rating	IK08
Diffuser finish	Opal
Diffuser material	PC Polycarbonate

DeltaWing LED - DALI dimmable & Microwave sensor DELTAWING LED72 DALI MW 4K 1200 0044899

Nominal Product Length (mm)	1218
Nominal Product Width (mm)	200
Nominal Product Height (mm)	85
Weight (kg)	3.5

Packaging

Single packaging type	Carton
Product EAN number	5410288448992
Packaging single length / height (cm)	122.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	22.5
DUN14 (outer)	05410288448992
Units per outer package	1
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	22.5

Safety data


Optimal operating condition (°C)	-10-25
----------------------------------	--------

PHOTOMETRY

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.24 1.64	8305	811° 1031	58.8° 582
1.0	2.48 3.28	2076	811° 258	58.8° 142
1.5	3.72 4.91	923	811° 116	58.8° 66
2.0	4.96 6.55	519	811° 64	58.8° 37
2.5	6.20 8.19	332	811° 41	58.8° 24
3.0	7.44 9.83	231	811° 29	58.8° 15

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 117.2°)
 — C90 - C270 (Half beam angle: 102.2°)

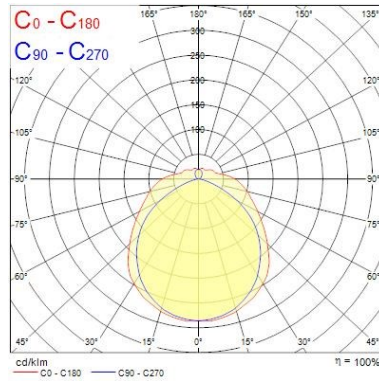

TECHNICAL DRAWINGS

