


Ascent 150 II Round Aluminium Reflector

ASCENT 150 II 2500 3K STD EM
2059358



Product features

- The ASCENT 150 II 2500 3K STD EM is a high efficient downlight luminaire , Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Class II, Protection rating IP44/IK03

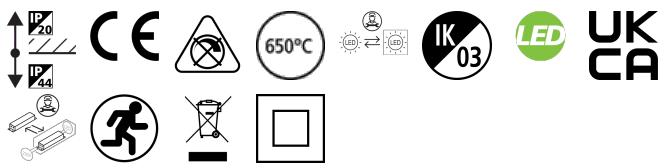


PRODUCT OVERVIEW

Product name	ASCENT 150 II 2500 3K STD EM
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	114
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	80
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	22
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
IP rating	IP44/20
IK rating	IK03
Product EAN number	5025768593583
Luminous flux (emergency) (lm)	427

PHOTOMETRY

Ascent 150 II Round Aluminium Reflector *ASCENT 150 II 2500 3K STD EM* 2059358

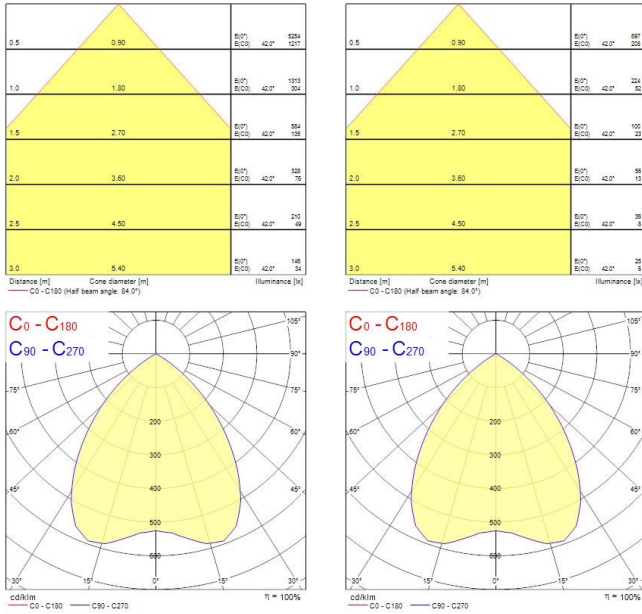

TECHNICAL DRAWINGS

