


## Ascent 100 II Arch 160

ASCENT 100 II ARCH 1900 4K STD 160  
2060555



### Product features

- The ASCENT 100 II ARCH 1900 4K STD 160 is a high efficient non dimmable downlight luminaire, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 178mm. Additional accessories of diffusers and plaster in available.

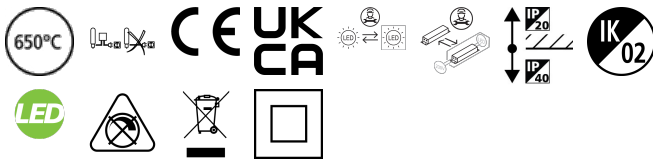



### PRODUCT OVERVIEW

Product name	ASCENT 100 II ARCH 1900 4K STD 160
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4260854
Warranty	5 years
Fixture luminous flux (lm)	1921
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	85
Glare control	< 24
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768605552

### PHOTOMETRY

## Ascent 100 II Arch 160

ASCENT 100 II ARCH 1900 4K STD 160  
2060555

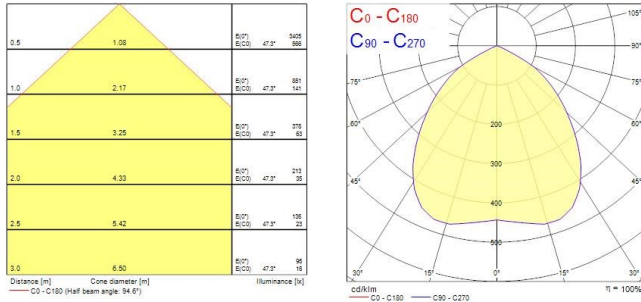

## TECHNICAL DRAWINGS

