


Myriad Pendant White - Surface Mounted

MYRIAD PENDANT 4000K SURFACE MTD SWITCHED WHITE
2050680



Product features

- High-end architectural (4000K) neutral white LED pendant with non dimmable driver and surface mounted housing, finished in a white finish (RAL9016)

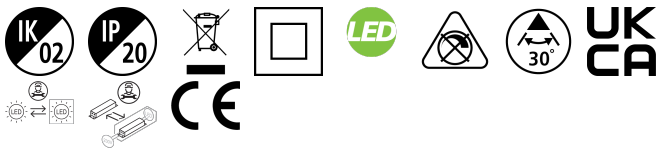


PRODUCT OVERVIEW

Product name	MYRIAD PENDANT 4000K SURFACE MTD SWITCHED WHITE
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001743
E-number SE	7561417
E-number Norway	3290211
Warranty	5 years
Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768506804

Myriad Pendant White - Surface Mounted

MYRIAD PENDANT 4000K SURFACE MTD SWITCHED WHITE
2050680

PHOTOMETRY



0.5	0.36	50%	19.8°	687	276
1.0	0.71	50%	19.8°	162	65
1.5	1.07	50%	19.8°	70	28
2.0	1.42	50%	19.8°	45	17
2.5	1.78	50%	19.8°	29	10
3.0	2.14	50%	19.8°	18	7

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 39.2°)

TECHNICAL DRAWINGS

