SYLVANIA



Seamless linkable linear LED light

LED Pipe



The new generation of Sylvania's LED Pipe range of luminaires have been designed for simple linear light applications, creating direct or indirect illumination within a room. The design of the luminaire allows seamless linking and you can connect in up to a 10 meter continuous run.

Each LED Pipe comes with fixings including optional tilting mounting brackets. A range of accessories are available separately; connector cables for linking around corners and 1.5m plugged cable.

sylvania-lighting.com

LED Pipe



Features

- LED batten (T5 batten equivalent)
 1000lm/m / 1500lm/m ideal for cove lighting and secondary illumination
- Available in 300 / 600 / 900 / 1,200 / 1,500mm length models
- Uniform light distribution
- Highly efficient: delivers up to 125lm/W (total system efficiency)
- Warm white (3,000K) or neutral white (4,000K)
- Integrated driver, direct input 220-240V
- High-quality robust Polycarbonate extrusion tube
- Seamless linking up to 10m runs
- Easy installation by mounting brackets
 (2 non-tiltable + 2 tiltable included)
- Energy class: A++, A+, A
- Low maintenance with 30,000 hours life expectancy

Product information

Code	Description	Total power consumption (W)	Fixture Lumen (Im)	Efficacy (lm/W)	Colour Temperature (K)	Drive Current (mA)	Beam Angle (°)	CRI	Length (mm)
LED Pipe									
0051361	LED PIPE L300 WW	3.5	350	100	3000	50	120	80	300
0051362	LED PIPE L600 WW	6.5	650	100	3000	50	120	80	600
0051363	LED PIPE L900 WW	9	900	100	3000	100	120	80	900
0051364	LED PIPE L1200 WW	11.5	1150	100	3000	100	120	80	1200
0051365	LED PIPE L1500 WW	14.5	1450	100	3000	150	120	80	1200
0051366	LED PIPE L300 NW	3.5	385	110	4000	50	120	80	300
0051367	LED PIPE L600 NW	6.5	720	111	4000	50	120	80	600
0051368	LED PIPE L900 NW	9	990	110	4000	100	120	80	900
0051369	LED PIPE L1200 NW	11.5	1275	111	4000	100	120	80	1200
0051370	LED PIPE L1500 NW	14.5	1600	110	4000	150	120	80	1500
0051371	LED PIPE L300 HIGH OUTPUT WW	4.5	520	116	3000	50	120	80	300
0051372	LED PIPE L600 HIGH OUTPUT WW	8	920	115	3000	100	120	80	600
0051373	LED PIPE L900 HIGH OUTPUT WW	11.5	1325	115	3000	100	120	80	900
0051374	LED PIPE L1200 HIGH OUTPUT WW	15	1725	115	3000	150	120	80	1200
0051375	LED PIPE L1500 HIGH OUTPUT WW	19	2175	114	3000	150	120	80	1500
0051376	LED PIPE L300 HIGH OUTPUT NW	4.5	560	124	4000	50	120	80	300
0051377	LED PIPE L600 HIGH OUTPUT NW	8	1000	125	4000	100	120	80	600
0051378	LED PIPE L900 HIGH OUTPUT NW	11.5	1450	126	4000	100	120	80	900
0051379	LED PIPE L1200 HIGH OUTPUT NW	15	1875	125	4000	150	120	80	1200
0051380	LED PIPE L1500 HIGH OUTPUT NW	19	2375	125	4000	150	120	80	1500

Additional images







Photometric Data

LED PIPE L1200 WW



LED Pipe



Code	Description	Housing Colour
Accessories		
0051387	LED PIPE CONNECTING CABLE 3 PACK	White
0051388	LED PIPE UK CABLE ACC	White
0051389	LED PIPE EUROPE CABLE ACC	White
0051390	LED PIPE Tiltable bracket	White
0051391	LED PIPE Non-Tiltable bracket	White


















Dimensions (mm)

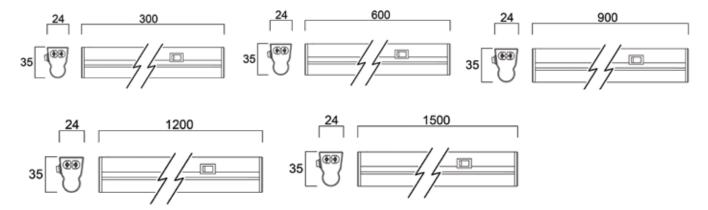















Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited.

Copyright Feilo Sylvania International Group Kft. July 2020

sylvania-lighting.com

A Feilo Sylvania Company