

ToLEDo Superia T8 CCG and AC

ToLEDo Superia T8 V7 5FT 4100LM 865
0029290



Product features

- A range of high performance ToLEDo Superia T8 LED tubes with reminiscent look of fluorescent tubes
- High performance glass construction design
- High lumen output, with an impressive lumen efficacy of 171 lm/W
- Omnidirectional light distribution and wide beam angle
- Average rated life of 50,000 hours
- Lamp length - 1500mm
- High power factor
- 200,000 switching cycle
- 5 years warranty for complete peace of mind
- Compatible with electromagnetic gear / CCG and also suitable for direct mains operation (220-240V)
- No bending or discoloration over time
- Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots, waterproof luminaires and maintenance free applications



PRODUCT OVERVIEW

Product name	ToLEDo Superia T8 V7 5FT 4100LM 865
Technology	LED
Watt (Rated) (W)	24
Type	LED exchangeable
Cap/Base	G13
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4941308
Warranty	5 years
Luminous flux (lm)	4100
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Wattage (W)	24
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	50000
Product EAN number	5410288292908

DATA TABLE

General data

Product name	ToLEDo Superia T8 V7 5FT 4100LM 865
Technology	LED
Watt (Rated) (W)	24
Type	LED exchangeable

ToLEDo Superia T8 CCG and AC

ToLEDo Superia T8 V7 5FT 4100LM 865
0029290

Cap/Base	G13
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C - 55°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4941308
Warranty	5 years

Optical data

Luminous flux (lm)	4100
Luminous flux (Rated) (lm)	4100
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	24
Product Voltage (V)	230
Control gear required	No
No. Of switching cycles before premature failures	>200000
Transformer required	No
Dimmable	No
Inrush Current (A)	6.4
Inrush Duration (µs)	624
Lamp Energy Label (class)	C
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	52
Max. Luminaires per 16A B Breaker	31

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

Nominal Product Length (mm)	1513
Nominal Product Diameter (mm)	28
Weight (kg)	0.26

Packaging

Single packaging type	Carton
Product EAN number	5410288292908
Packaging single length / height (cm)	155.5

ToLEDo Superia T8 CCG and AC


ToLEDo Superia T8 V7 5FT 4100LM 865
0029290

Packaging single width (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (outer)	15410288292905
Units per outer package	10
Packaging outer length / height (cm)	161.0
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	10.5


Safety data

Optimal operating condition (°C)	-20-55
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	Suitable for totally enclosed fixture

PHOTOMETRY

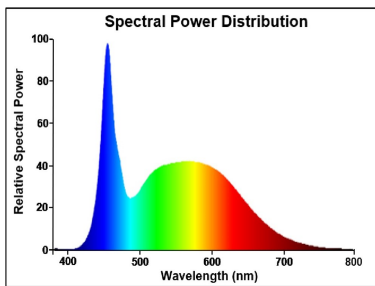

TECHNICAL DRAWINGS




ToLEDo Superia T8 CCG and AC
ToLEDo Superia T8 V7 5FT 4100LM 865
0029290



SYLVANIA

0029290

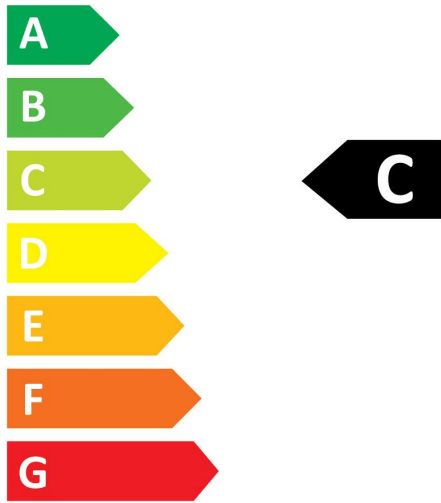

24
kWh/1000h




2019/2015

ToLEDo Superia T8 CCG and AC
ToLEDo Superia T8 V7 5FT 4100LM 865
0029290



0029290

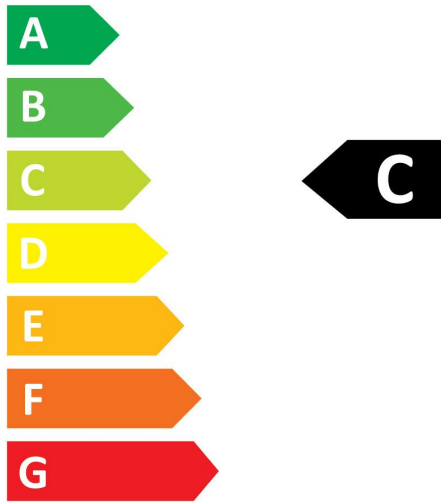

24
kWh/1000h



2019/2015