

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI E3

0048789



Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1278 mm x W 110 mm x H 78 mm size, GRP housing, PMMA diffuser, DALI dimmable, 3 hour emergency, 4000K, CRI80, 5550 lm, 38 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.



PRODUCT OVERVIEW

Product name	HYDROPROOF LED G3 1200mm Twin 4K DALI E3
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	5550
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	270
Total power consumption (W)	38
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487892
Luminous flux (emergency) (lm)	270

DATA TABLE

General data

Product name	HYDROPROOF LED G3 1200mm Twin 4K DALI E3
Technology	LED
Housing	Polyester

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI E3

0048789

Mount	Ceiling surface mounting
General application	Logistics & Industry
Operating temperature range (°C)	0°C - 30°C
ETIM Class	EC000109
Warranty	5 years

Optical data

Fixture luminous flux (lm)	5550
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	270
Emergency duration (h)	3

Electrical data

Total power consumption (W)	38
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	300
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	DC/50/60Hz

Lifetime data

Lifespan L70 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1278
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.36

Packaging

Single packaging type	Carton
Product EAN number	5410288487892
Packaging single length / height (cm)	137.2

Hydroproof LED G3 DALI


HYDROPROOF LED G3 1200mm Twin 4K DALI E3 0048789

Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487892
Units per outer package	1
Packaging outer length / height (cm)	137.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

Safety data

Optimal operating condition (°C)	0-30
Dry applications use only	No

PHOTOMETRY

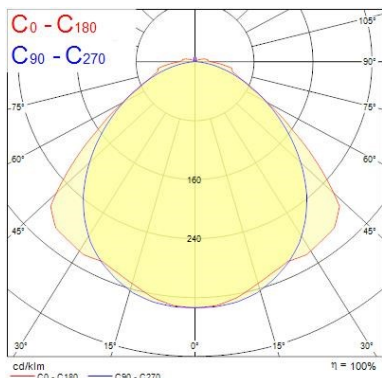

Distance [m]	Cone diameter [m]	E ₀ [lx]	E _{10°} [lx]	E _{30°} [lx]	E _{45°} [lx]
0.5	1.25 1.40	7487	917	917	734
1.0	2.50 2.80	1872	229	229	183
1.5	3.74 4.21	832	102	102	82
2.0	4.99 5.61	489	67	67	46
2.5	6.24 7.01	299	37	37	29
3.0	7.49 8.41	208	28	28	21


Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 109.0°)
— C90 - C270 (Half beam angle: 102.6°)

Distance [m]	Cone diameter [m]	E ₀ [lx]	E _{10°} [lx]	E _{30°} [lx]	E _{45°} [lx]
0.5	1.25 1.40	364	46	46	36
1.0	2.50 2.80	91	11	11	9
1.5	3.74 4.21	40	5	5	4
2.0	4.99 5.61	23	3	3	2
2.5	6.24 7.01	15	2	2	1
3.0	7.49 8.41	10	1	1	1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 109.0°)
— C90 - C270 (Half beam angle: 102.6°)

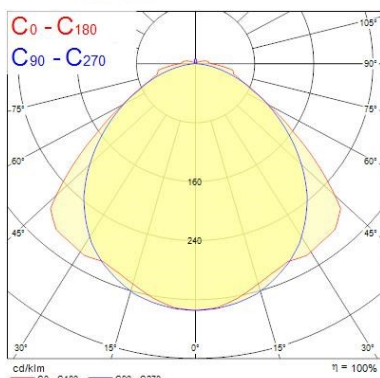

TECHNICAL DRAWINGS

