


Ascent 150 II Round Aluminium Reflector

ASCENT 150 II 2500 3K STD
2059356



Product features

- The ASCENT 150 II 2500 3K STD is a high efficient downlight luminaire , Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Class II, Protection rating IP44/IK03

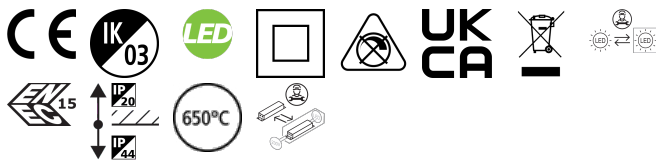


PRODUCT OVERVIEW

Product name	ASCENT 150 II 2500 3K STD
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4237879
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	132
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	80
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	19
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
IP rating	IP44/20
IK rating	IK03
Product EAN number	5025768593569

PHOTOMETRY

Ascent 150 II Round Aluminium Reflector *ASCENT 150 II 2500 3K STD* 2059356



Distance [m]	Cone diameter [m]	E10%	E50%	E90%	Illuminance [lx]
0.5	0.90	50%	E(C0)	42.0°	524 127
1.0	1.80	50%	E(C0)	42.0°	131 32
1.5	2.70	50%	E(C0)	42.0°	56 13
2.0	3.60	50%	E(C0)	42.0°	32 7
2.5	4.50	50%	E(C0)	42.0°	21 5
3.0	5.40	50%	E(C0)	42.0°	14 3

Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 42.0°)

TECHNICAL DRAWINGS

