

## Start Flood LED

START FLOOD LED 2100LM 26W 3000K

0047822



### Product features

- LED floodlight, IP65, 2100 Lm, 26 W, 3000K, beam angle 100°, black aluminium die-cast body, 60 mm x 180 mm x 195 mm, 30000 hours lifetime.



### PRODUCT OVERVIEW

Product name	START FLOOD LED 2100LM 26W 3000K
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	External
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579150
E-number SE	7764798
Warranty	3 years
Fixture luminous flux (lm)	2100
Luminaire efficacy (lm/W)	81
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	100
Glare control	< 27
Photobiological Risk Group	RG1
Total power consumption (W)	26
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 7021 - Black grey
IP rating	IP65
IK rating	IK07
Product EAN number	5410288478227

### DATA TABLE

## Start Flood LED

START FLOOD LED 2100LM 26W 3000K

0047822

### General data

Product name	START FLOOD LED 2100LM 26W 3000K
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	External
General application	Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4579150
E-number SE	7764798
Warranty	3 years

### Optical data

Fixture luminous flux (lm)	2100
Luminaire efficacy (lm/W)	81
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Adjustable chromaticity	N
Beam Angle (°)	100
Glare control	< 27
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	26
Current (A)	0.125
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class I
Control gear type	LED driver constant current
Transformer required	Yes
Dimmable	No
Drive current (mA)	630
Inrush Current (A)	7
Inrush Duration (µs)	120
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	18
Max. Luminaires per 13A C Breaker	23
Max. Luminaires per 16A C Breaker	28
Max. Luminaires per 20A C Breaker	35

### Lifetime data

## Start Flood LED

START FLOOD LED 2100LM 26W 3000K  
0047822

Lifespan L70 B50	30000
------------------	-------

### Physical data

Housing colour	RAL 7021 - Black grey
IP rating	IP65
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	59.5
Nominal Product Width (mm)	180
Nominal Product Height (mm)	194.5
Weight (kg)	0.9


### Packaging

Single packaging type	Carton
Product EAN number	5410288478227
Packaging single length / height (cm)	19.17
Packaging single width (cm)	6.63
Packaging single depth (cm)	17.53
DUN14 (outer)	15410288478224
Units per outer package	6
Packaging outer length / height (cm)	40.4
Packaging outer width (cm)	18.5
Packaging outer depth (cm)	22.1

### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

## PHOTOMETRY

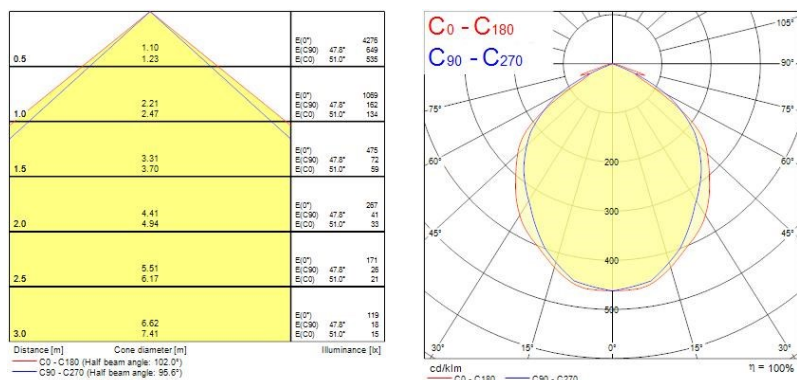

## TECHNICAL DRAWINGS

## Start Flood LED

*START FLOOD LED 2100LM 26W 3000K*

0047822

