

## Start Flood LED

START FLOOD LED 2100LM 26W 3000K

0047822



### Product features

- LED floodlight, IP65, 2100 Lm, 26 W, 3000K, beam angle 100°, black aluminium die-cast body, 60 mm x 180 mm x 195 mm, 30000 hours lifetime.





## PRODUCT OVERVIEW

|                                 |                                  |
|---------------------------------|----------------------------------|
| Product name                    | START FLOOD LED 2100LM 26W 3000K |
| Technology                      | LED                              |
| Housing                         | Aluminium                        |
| Mount                           | Wall surface mounted             |
| Environment                     | External                         |
| General application             | Residential & Consumer           |
| ETIM Class                      | EC001744                         |
| E-number FI                     | 4579150                          |
| E-number SE                     | 7764798                          |
| Warranty                        | 3 years                          |
| Fixture luminous flux (lm)      | 2100                             |
| Luminaire efficacy (lm/W)       | 81                               |
| LOR (%)                         | 100                              |
| Colour temperature (K)          | 3000                             |
| Light colour                    | Warm White                       |
| CRI (Ra)                        | 80                               |
| Colour Variation Initial (SDCM) | SDCM6                            |
| Beam Angle (°)                  | 100                              |
| Glare control                   | < 27                             |
| Photobiological Risk Group      | RG1                              |
| Total power consumption (W)     | 26                               |
| Electrical protection           | Class I                          |
| Control gear type               | LED driver constant current      |
| Dimmable                        | No                               |
| LED Flickering Rate             | Medium (21% - 40%)               |
| Housing colour                  | RAL 7021 - Black grey            |
| IP rating                       | IP65                             |
| IK rating                       | IK07                             |
| Product EAN number              | 5410288478227                    |

## PHOTOMETRY

## Start Flood LED

START FLOOD LED 2100LM 26W 3000K  
0047822

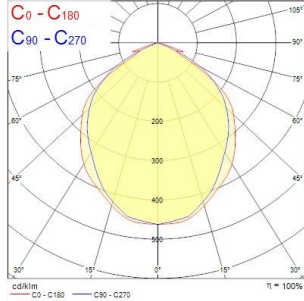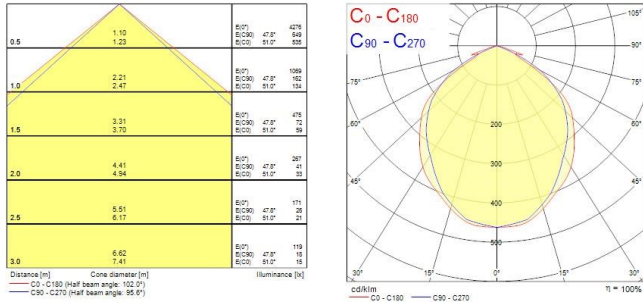

## TECHNICAL DRAWINGS

