

## Start Track Spot Small DALI

START Track Spot S DALI 1350lm 940 MB BLK  
0004947



### Product features

- Spotlight for track mounting, decorative heat sink, black (RAL 9005) housing, equipped with Global GAC69 Pulse Adaptor, 1359 Lm, 14 W, 97 Lm/W, 4000 K, drive current: 350 mA, CRI 90, 36° beam angle, DALI dimmable, IP20, IK02, 50000 hrs, (H x W) 200 x 140 mm.




### PRODUCT OVERVIEW

Product name	START Track Spot S DALI 1350lm 940 MB BLK
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Retail
ETIM Class	EC001744
E-number FI	4274482
E-number SE	7426220
Warranty	5 years
Fixture luminous flux (lm)	1359
Luminaire efficacy (lm/W)	97
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	14
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Product EAN number	5410288049472

### PHOTOMETRY

## Start Track Spot Small DALI

START Track Spot S DALI 1350lm 940 MB BLK  
0004947

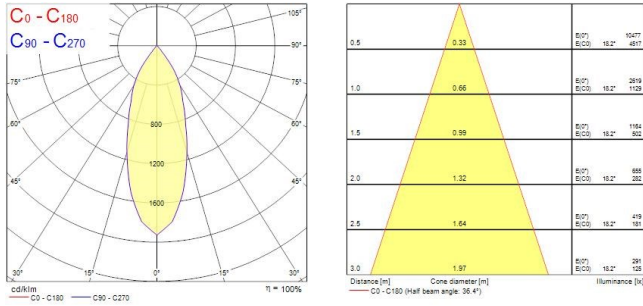

### TECHNICAL DRAWINGS

