

## Beacon LED

*BEACON 93CRI 3K WIDE BEAM L1 ON-BOARD DIM WHITE*  
2059595



### Product features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 55° wide beam, optics: Aluminium reflector, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1700lm, luminaire efficacy: 81lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 1-circuit track adaptor, suitable for Concord Lytespan 1 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x169mm, weight: 0.96kg.



### PRODUCT OVERVIEW

Product name	BEACON 93CRI 3K WIDE BEAM L1 ON-BOARD DIM WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	81
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	55
Photobiological Risk Group	RG1
Total power consumption (W)	21
Product Voltage (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Minimum dimming level (%)	95
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768595952

### DATA TABLE

## Beacon LED

*BEACON 93CRI 3K WIDE BEAM L1 ON-BOARD DIM WHITE*

2059595

### General data

Product name	BEACON 93CRI 3K WIDE BEAM L1 ON-BOARD DIM WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	81
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	55
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	21
Mains voltage (V)	220-240V~
Product Voltage (V)	240
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Transformer required	Yes
Minimum dimming level (%)	95
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	48
Max. Luminaires per 16A C Breaker	80

### Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	43000

## Beacon LED

*BEACON 93CRI 3K WIDE BEAM L1 ON-BOARD DIM WHITE*  
2059595

Lifespan L90 B20	36000
Lifespan L90 B10	33000


### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Height (mm)	169
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

### Packaging

Single packaging type	Carton
Product EAN number	5025768595952
Packaging single length / height (cm)	16.0
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768595952
Units per outer package	1
Packaging outer length / height (cm)	16.0
Packaging outer width (cm)	17.6
Packaging outer depth (cm)	18.2

## PHOTOMETRY

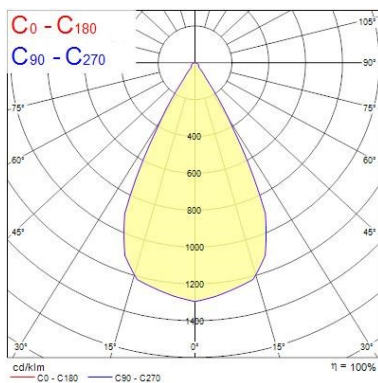

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1</sub> [lx]	E <sub>2</sub> [lx]
0.5	0.52	8812	27.6°	3079
1.0	1.05	2203	27.6°	768
1.5	1.57	979	27.6°	341
2.0	2.09	551	27.6°	192
2.5	2.61	352	27.6°	123
3.0	3.14	245	27.6°	85

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 55.2°)

## TECHNICAL DRAWINGS

