

Start Track Spot Large DALI


START Track Spot L DALI 3600lm 940 MB WHT

0004935



Product features

- Spotlight for track mounting, decorative heat sink, white (RAL 9016) housing, equipped with Global GAC69 Pulse Adaptor, 3616 Lm, 36 W, 100 Lm/W, 4000 K, drive current: 900 mA, CRI 90, 38° beam angle, DALI dimmable, IP20, IK02, 50000 hrs, (H x W) 240 x 164 mm.

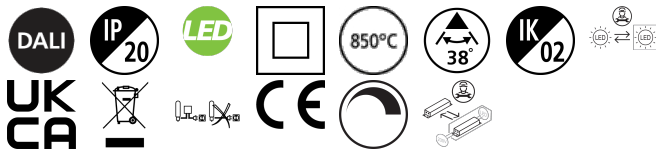



PRODUCT OVERVIEW

Product name	START Track Spot L DALI 3600lm 940 MB WHT
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Retail
ETIM Class	EC001744
E-number FI	4274464
E-number SE	7426207
Warranty	5 years
Fixture luminous flux (lm)	3616
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5410288049359

PHOTOMETRY

Start Track Spot Large DALI

START Track Spot L DALI 3600lm 940 MB WHT
0004935

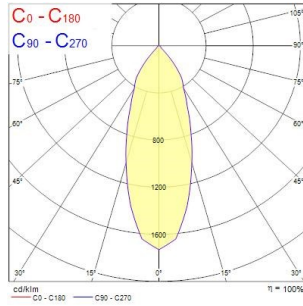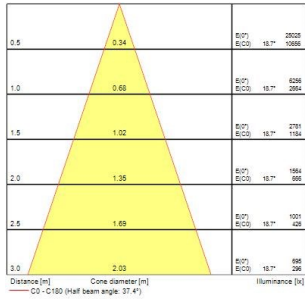

TECHNICAL DRAWINGS

