


RANA Linear Surface&Suspended - Opal Diffuser

RANA LINEAR S 3KLM WW OPAL
0051278



Product features

- Surface or Suspended LED Linear luminaire with Opal diffuser, Dimensions: 1150mm x 87mm x 87mm, Direct, White Body, Warm White LED (3000K), 3220lm, 31W, 104lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<23, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C

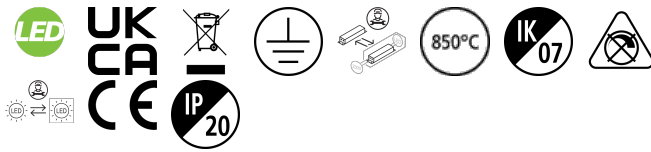

PRODUCT OVERVIEW

Product name	RANA LINEAR S 3KLM WW OPAL
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Office, Hospitality, Retail, Education
ETIM Class	EC002892
E-number SE	7502659
Warranty	5 years
Fixture luminous flux (lm)	3220
Luminaire efficacy (lm/W)	103.87
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288512785

DATA TABLE

RANA Linear Surface&Suspended - Opal Diffuser

RANA LINEAR S 3KLM WW OPAL
0051278

General data

Product name	RANA LINEAR S 3KLM WW OPAL
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Office, Hospitality, Retail, Education
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number SE	7502659
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3220
Luminaire efficacy (lm/W)	103.87
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Glare control	< 23
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	31
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	No
Drive current (mA)	300
Inrush Current (A)	15
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	63
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	24
Max. Luminaires per 13A B Breaker	31
Max. Luminaires per 16A B Breaker	38

RANA Linear Surface&Suspended - Opal Diffuser

RANA LINEAR S 3KLM WW OPAL
0051278

Max. Luminaires per 20A B Breaker 48

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	60000
Lifespan L90 B10	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	87
Nominal Product Height (mm)	87
Weight (kg)	2.958

Packaging

Single packaging type	Carton
Product EAN number	5410288512785
Packaging single length / height (cm)	116.0
Packaging single width (cm)	10.3
Packaging single depth (cm)	10.0
DUN14 (outer)	5410288512785
Units per outer package	1
Packaging outer length / height (cm)	116.0
Packaging outer width (cm)	10.3
Packaging outer depth (cm)	10.0


Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

RANA Linear Surface & Suspended - Opal Diffuser

RANA LINEAR S 3KLM WW OPAL
0051278

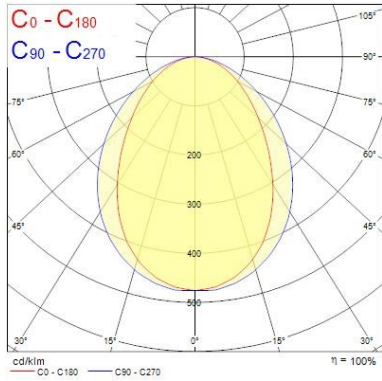

Distance [m]	Cone diameter [m]	E(I)°	E(C90)	E(C0)	Illuminance [lx]
0.5	1.13 0.80	45.8°	38.5°	1471	6133
1.0	2.27 1.59	45.8°	38.5°	359	1532
1.5	3.40 2.39	45.8°	38.5°	153	591
2.0	4.54 3.18	45.8°	38.5°	92	383
2.5	5.67 3.98	45.8°	38.5°	59	245
3.0	6.81 4.77	45.8°	38.5°	41	170

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 77.0°)
 C90 - C270 (Half beam angle: 37.2°)

TECHNICAL DRAWINGS

