



## Balanced performance

### Concord Beacon Accent

Architectural lighting by **SYLVANIA**




From Concord's award-winning Beacon Family, we present Beacon Accent. This range of LED spotlights has been specifically designed for museums, galleries and high-end retail where colour rendition plays an important and active role.

With a super high CRI of 97 and the R9 value (saturated red) at 90; the Beacon Accent range ensures for truer, richer and more vibrant colours.

The addition of the dark-light detail helps to reduce glare and increase visual comfort. Available in 3000K and 4000K CCT's, dimming via an on-board potentiometer and a choice of 3 beam angles – Intense Narrow, Medium and Wide.

# Concord Beacon Accent



## Features

- A comprehensive range of high quality accent LED spotlights; ideal for museum and gallery applications
- Super high colour rendering with CRI 97 typical; with R9 value at 90
- Low glare, dark-light detail for increased accentuation and visual comfort
- Intense Narrow (10°), Medium (37°) and Wide (52°) beam options
- Dimming via On-board potentiometer
- For mounting on 1-circuit track (Lytespan 1) or 3-circuit track (Lytespan 3)
- Available in 3000K or 4000K colour temperatures
- White or Black paint finish as standard. Other colours available on request.
- Accessories available (Elongation lens, Softner lens, Honeycomb filter, Barn door and Snoot)
- IR/UV free light source without heat radiation
- Energy Class: A++, A+, A
- Long lifetime: >72,000 hours life at L80B10
- LED technology provides an energy efficient solution with reduced maintenance costs

## Product information

Code	Description	Finish	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Beam Angle (°)	Colour Temp (K)	CRI	Dimmable	Control Technology	Average Rated Life (Hrs)
<b>Beacon Accent - 97 CRI - 3000K</b>											
2059544	Beacon Accent 97CRI 3K Narrow Beam L1 On-Board DIM Black	Black	21	503	24	10	3000	97	Yes	Onboard Pot	50,000
2059545	Beacon Accent 97CRI 3K Narrow Beam L1 On-Board DIM White	White	21	503	24	10	3000	97	Yes	Onboard Pot	50,000
2059546	Beacon Accent 97CRI 3K Medium Beam L1 On-Board DIM Black	Black	21	1410	67	37	3000	97	Yes	Onboard Pot	50,000
2059547	Beacon Accent 97CRI 3K Medium Beam L1 On-Board DIM White	White	21	1410	67	37	3000	97	Yes	Onboard Pot	50,000
2059548	Beacon Accent 97CRI 3K Wide Beam L1 On-Board DIM Black	Black	21	1451	69	52	3000	97	Yes	Onboard Pot	50,000
2059549	Beacon Accent 97CRI 3K Wide Beam L1 On-Board DIM White	White	21	1451	69	52	3000	97	Yes	Onboard Pot	50,000
2059556	Beacon Accent 97CRI 3K Narrow Beam L3 On-Board DIM Black	Black	21	503	24	10	3000	97	Yes	Onboard Pot	50,000
2059557	Beacon Accent 97CRI 3K Narrow Beam L3 On-Board DIM White	White	21	503	24	10	3000	97	Yes	Onboard Pot	50,000
2059558	Beacon Accent 97CRI 3K Medium Beam L3 On-Board DIM Black	Black	21	1410	67	37	3000	97	Yes	Onboard Pot	50,000
2059559	Beacon Accent 97CRI 3K Medium Beam L3 On-Board DIM White	White	21	1410	67	37	3000	97	Yes	Onboard Pot	50,000
2059560	Beacon Accent 97CRI 3K Wide Beam L3 On-Board DIM Black	Black	21	1451	69	52	3000	97	Yes	Onboard Pot	50,000
2059561	Beacon Accent 97CRI 3K Wide Beam L3 On-Board DIM White	White	21	1451	69	52	3000	97	Yes	Onboard Pot	50,000

Legend: BCON = BeaCON; ACT = ACcent; NB = Narrow Beam; MB = Medium Beam; WB = Wide Beam; L1 = Lytespan 1-circuit; L3 = Lytespan 3-circuit; OB = On-Board dimming; WHT = WHiTe; BLK = BLAcK

## Additional Images



# Concord Beacon Accent



## Product information

Code	Description	Finish	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Beam Angle (°)	Colour Temp (K)	CRI	Dimmable	Control Technology	Average Rated Life (Hrs)
<b>Beacon Accent - 97 CRI - 4000K</b>											
2059550	Beacon Accent 97CRI 4K Narrow Beam L1 On-Board DIM Black	Black	21	576	27	10	4000	97	Yes	Onboard Pot	50,000
2059551	Beacon Accent 97CRI 4K Narrow Beam L1 On-Board DIM White	White	21	576	27	10	4000	97	Yes	Onboard Pot	50,000
2059552	Beacon Accent 97CRI 4K Medium Beam L1 On-Board DIM Black	Black	21	1528	73	37	4000	97	Yes	Onboard Pot	50,000
2059553	Beacon Accent 97CRI 4K Medium Beam L1 On-Board DIM White	White	21	1528	73	37	4000	97	Yes	Onboard Pot	50,000
2059554	Beacon Accent 97CRI 4K Wide Beam L1 On-Board DIM Black	Black	21	1578	75	52	4000	97	Yes	Onboard Pot	50,000
2059555	Beacon Accent 97CRI 4K Wide Beam L1 On-Board DIM White	White	21	1578	75	52	4000	97	Yes	Onboard Pot	50,000
2059562	Beacon Accent 97CRI 4K Narrow Beam L3 On-Board DIM Black	Black	21	576	27	10	4000	97	Yes	Onboard Pot	50,000
2059563	Beacon Accent 97CRI 4K Narrow Beam L3 On-Board DIM White	White	21	576	27	10	4000	97	Yes	Onboard Pot	50,000
2059564	Beacon Accent 97CRI 4K Medium Beam L3 On-Board DIM Black	Black	21	1528	73	37	4000	97	Yes	Onboard Pot	50,000
2059565	Beacon Accent 97CRI 4K Medium Beam L3 On-Board DIM White	White	21	1528	73	37	4000	97	Yes	Onboard Pot	50,000
2059566	Beacon Accent 97CRI 4K Wide Beam L3 On-Board DIM Black	Black	21	1578	75	52	4000	97	Yes	Onboard Pot	50,000
2059567	Beacon Accent 97CRI 4K Wide Beam L3 On-Board DIM White	White	21	1578	75	52	4000	97	Yes	Onboard Pot	50,000


Legend: BCON = BeaCON; ACT = ACcEnT; NB = Narrow Beam; MB = Medium Beam; WB = Wide Beam; L1 = Lytespan 1-circuit; L3 = Lytespan 3-circuit; OB = On-Board dimming; WHT = WHiTe; BLK = BLAcK

## Accessories


Code	Description
<b>Accessories</b>	
2059772	Beacon Elongation Lens
2059774	Beacon Softener Lens
2059773	Beacon Honeycomb Filter
2059758	Beacon Snoot
2058327	Beacon/Beacon Muse II Barn Door
3020010	Monopoint L3 White
3020080	Monopoint L3 Black



## Photometric Data

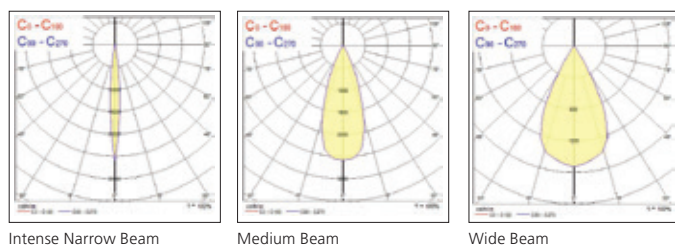

## Dimensions (mm)

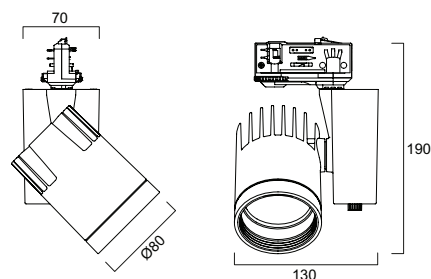

# Concord



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft. Copyright Feilo Sylvania International Group Kft. August 2020.

[sylvania-lighting.com](http://sylvania-lighting.com)

A Feilo Sylvania Company