


Expospot 70 fixed - Sylvania

EXPOSPOT 70 FIXED RA80 4000K WB WHITE
0060230



Product features

- Integrated LED fixed accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 54°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1987lm, 65lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 100mm, dimensions: 110x101mm, weight: 0.52kg.

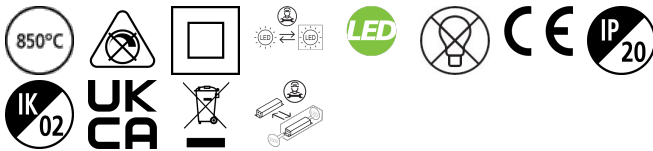


PRODUCT OVERVIEW

Product name	EXPOSPOT 70 FIXED RA80 4000K WB WHITE
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	1987
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	54
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288602301

PHOTOMETRY

Expospot 70 fixed - Sylvania EXPOSPOT 70 FIXED RA80 4000K WB WHITE 0060230



Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C) [lx]	Beam angle [°]
0.5	0.51	10271	26.8°	1781
1.0	1.01	2543	26.8°	942
1.5	1.52	1178	26.8°	478
2.0	2.02	661	26.8°	238
2.5	2.53	422	26.8°	160
3.0	3.03	284	26.8°	104

Distance [m] Cone diameter [m] Illuminance [lx]
C0-C180 (Half beam angle: 53.6°)

TECHNICAL DRAWINGS

